

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 21 TOWNSHIP 16 RANGE 4

DATE: 5-8-03-- 2-24-04

PARTY CHIEF: Wilcoxon

CREW:

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 9-16-98

IN. S.P.C. E ZONE NAD '83

NAME: 16042104

N: 507419.6947(m)

E: 62669.9684(m)

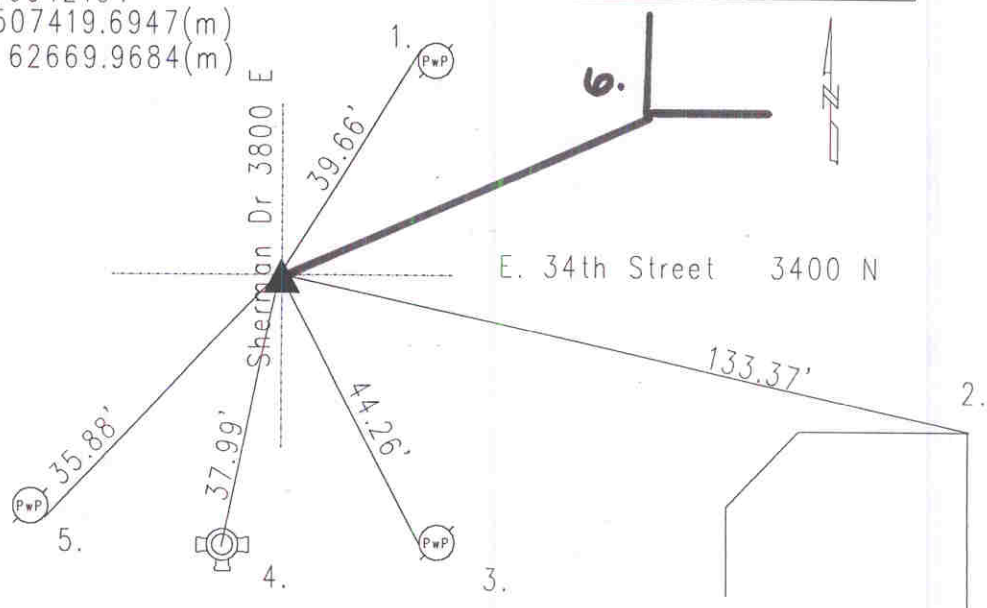

Original post set 1820 by John Hendricks with witnesses: 20" beech N 72 E 30 links; 16" dogwood S 65 W 26 links per Marion County Atlas pg. 11. Survey by Hosbrook 3-20-1854 called no stone but witness: 20" beech N 50 1/2 W 92 links, 8" sugar N 15 1/2 E 100 links per Center Township Legal Survey Books pg. 2. Hosbrook 4-4-1856 called no stone but witness: 16" beech N 50 1/2 W 92 links, 8" sugar N 15 1/2 E 100 links per Center Township Legal Survey Book pg. 3. MCSO 7-28-47 called a bolt found in concrete. Wilcoxon 3-16-76 called a boat spike. Gries 12-4-87 called same. Kiste 7-26-96 called same. Excavated by Wilcoxon 9-16-98 and railroad spike found 4" down. Boat spike found 12" down in concrete pavement. Stone fd 17" down under boat spike. Harrison set. Re-tied 5-8-03 by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	39.66'	Mag nail w/washer NW PwP#297-412 B 6"up
2.	133.37'	NE corner of stone
3.	44.26'	Mag nail w/brass washer W PwP#248-442 A 6"up
4.	37.99'	Top nut of fire hydrant
5.	35.88'	Mag nail w/brass washer SE PwP#178-441 A 3"up
6	79.39'	SW corner of stone building